


ORIENTATION:



SETTING UP:

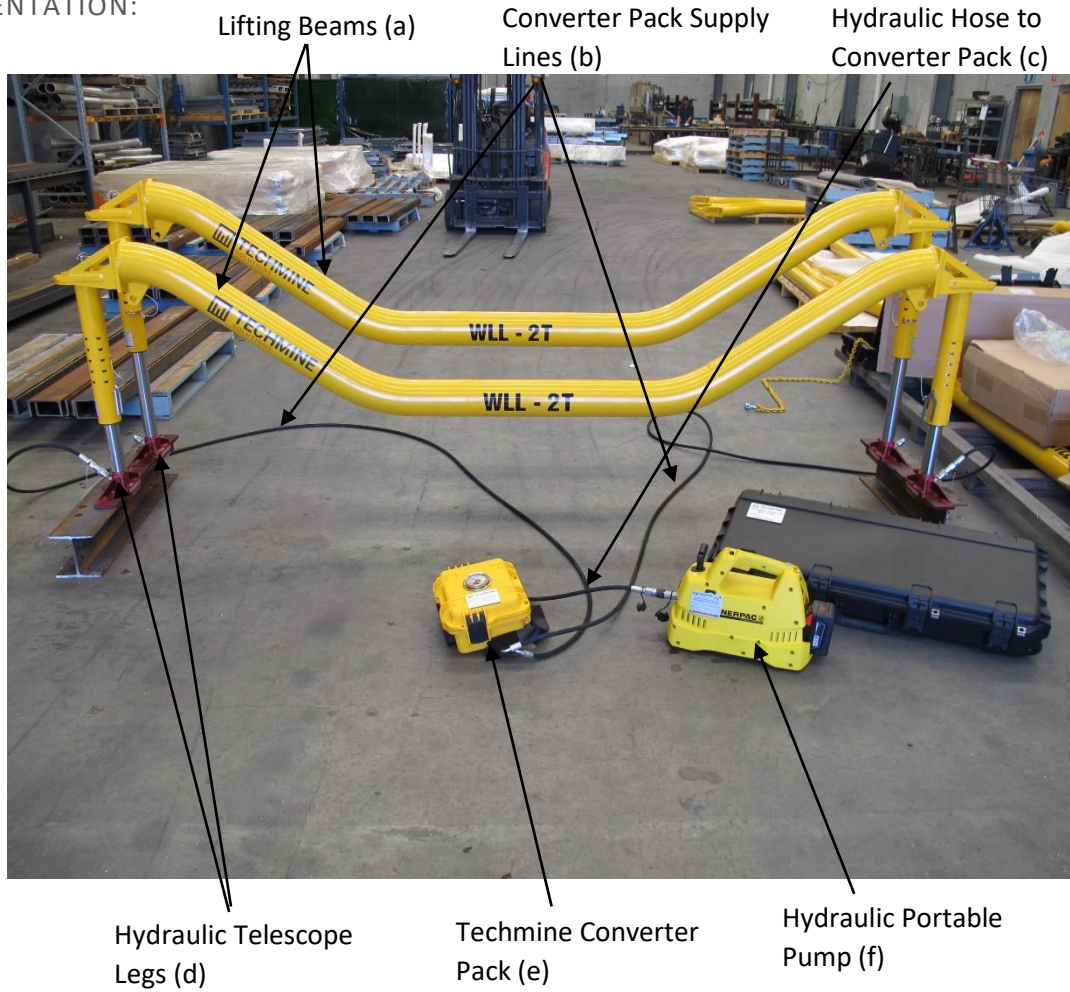

Wipe down stringer



Stand up left and right telescope legs (d)



Pass lifting beam (a) under conveyor



Position lifting beam (a) as centrally as possible



Install and tighten M24 securing nuts (¼ turn)



Ensure hydraulic hoses are clean before connecting



Connect converter pack supply lines (b) to hydraulic telescope (d)



Connect hydraulic portable pump (f) to Techmine converter pack (e) using hydraulic hose (c)

Operation:



Orientate "T" bar handle to "A" for operation



Switch trigger lock out to unlock position



Depress trigger to operate pump and lift cylinders



Slide in locking pin to secure load



Orientate "T" bar handle to "T" position to lower cylinders



Lower lifter onto locking pin



Ensure hydraulic pressure gauge on converter pack reads 0